CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

WEST 1/4 Corner of Section 13, Township 102N, Range 42W, 5th P.M.

STATE OF MINNESOTA, County of NOBLES


At the corner location shown on the sketch:

☒ On 3/08/2006 (DATE) found a 5/8" REBAR, 2" DEEP, IN C/L OF ROAD, OPPOSITE I-90 R/W FENCES, RUNNING EAST & WEST.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

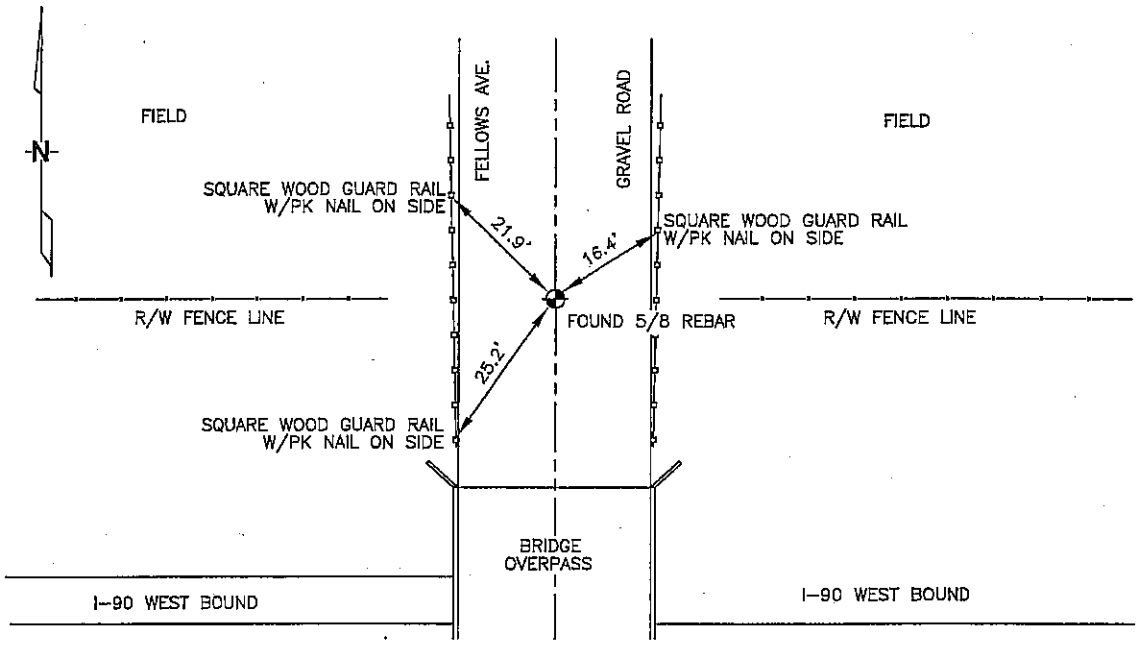

N: 566,104.83
E:2,139,113.73
MN SOUTH ZONE: NAD 83

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Thomas V. Zeff — 5/18/06

Thomas V. Zeff (DATE)

Registration No. 44563

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 20____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

WEST 1/4 CORNER, SECTION 13, T. 102 N., R. 42 W.,
NOBLES COUNTY, MINNESOTA

1868	JEWETT & HOWE, US. Deputy Surveyors, monumented corner.
1938	Nobles County found stone; no ties.
1959	Nobles County found stone, placed iron pin; no ties.
1963	MN DOT R/W Map for I-90, calls for a "X" mark on a stone, in place at the corner.
3/08/2006	Ulteig Engineers, Inc., Survey Crew, Dennis Lavallie Party Chief, found a 5/8" rebar, 2" down. Ties: NW-21.9 to pk in sq. wood post, south side, up 6" SW-25.2 to pk nail in sq. wood post, north side. up 8" NE-16.4 to pk nail in sq. wood post, south side, up 4"