

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 10, Township 102 N, Range 43 W, 5th P.M.
 STATE OF MINNESOTA, County of NOBLES


At the corner location shown on the sketch:

☒ On 11/13/02 found a 5/8" REROD
DATE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

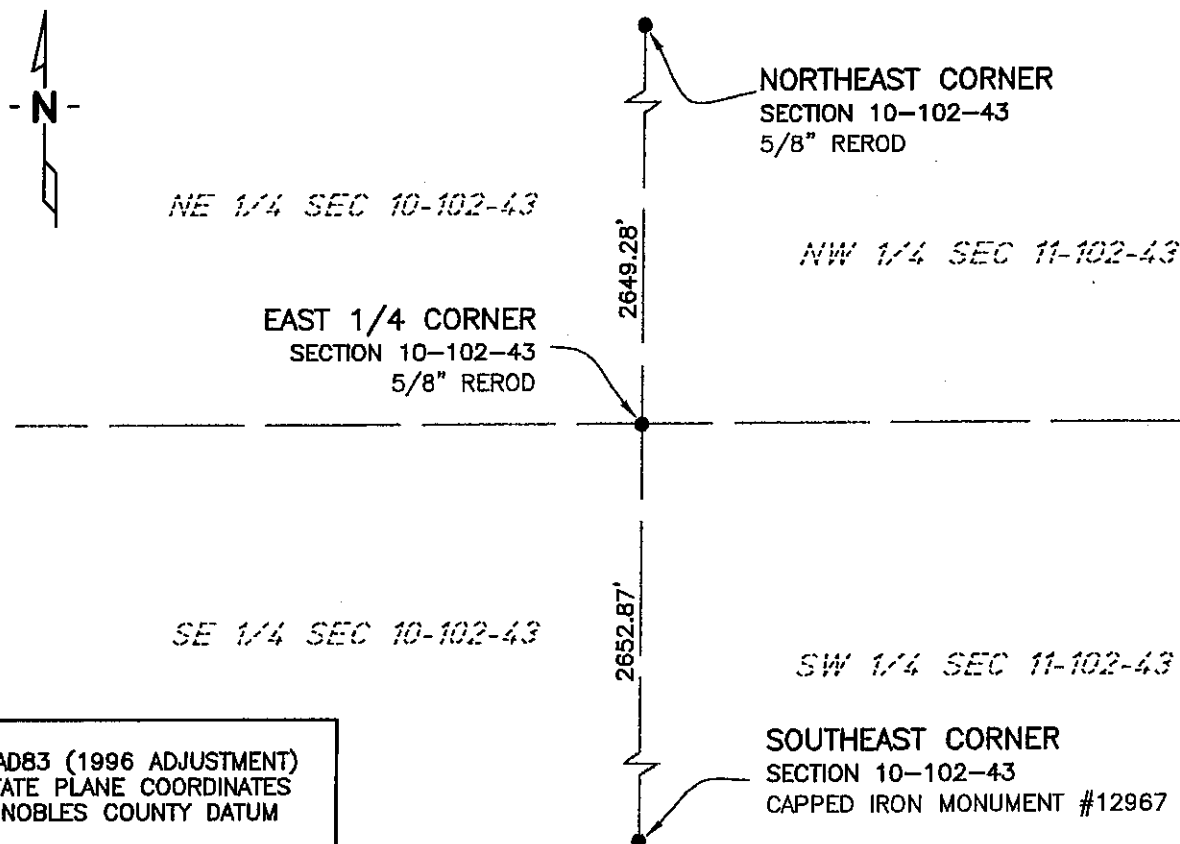

NAD83 (1996 ADJUSTMENT)
 STATE PLANE COORDINATES
 NOBLES COUNTY DATUM

N= 155588.949

E= 493919.302

BOOK: NOBLES CO. PG. 30
 I:\NOBLS\CERTIFICATES\E10-102-43

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Janele Fowlds
 JANELE FOWLDS

10/4/05
 DATE

Registration No. 26748

☒ Land surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at ____ M. on the _____ day of _____ A.D., 19____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

East Quarter Corner Section 10, Township 102 North, Range 43 West

According to the Original Survey notes located in the Secretary of States Office, the East Quarter of Section 10 was established as follows: North between Sections 10 & 11, Variance 11 degrees 20 minutes, at 40.00 chains set a post in mound with pits for the Quarter Section Corner.

- | | |
|------|---|
| 1892 | Nobles County Highway Department records show a stone was set. |
| 1967 | Nobles County Highway Department records show a wood stake, and that an iron pin was set. |
| 1981 | Nobles County Highway Department records show an iron pin. |
| 1983 | Nobles County Highway Department records show an iron pin was placed after construction, with ties as follows:
"X" on north end field entrance CMP – Northeast 46.58'
"X" on south end field entrance CMP – Southeast 40.63'
"X" on south end field entrance CMP – Southwest |
| 2002 | On November 13, Bolton & Menk, Inc. found a 5/8" Rerod 1' below the surface in a county road. |