Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTHEAST Corner of Section 17, Township 102N, Range 43W, 5TH P.M.

STATE OF MINNESOTA, County of NOBLES


At the corner location shown on the sketch :

☒ On 2/27/2006 found A 3/8" REBAR IN ASPHALT PAVEMENT AT INTERSECTION.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ set _____

Sketch of reference ties

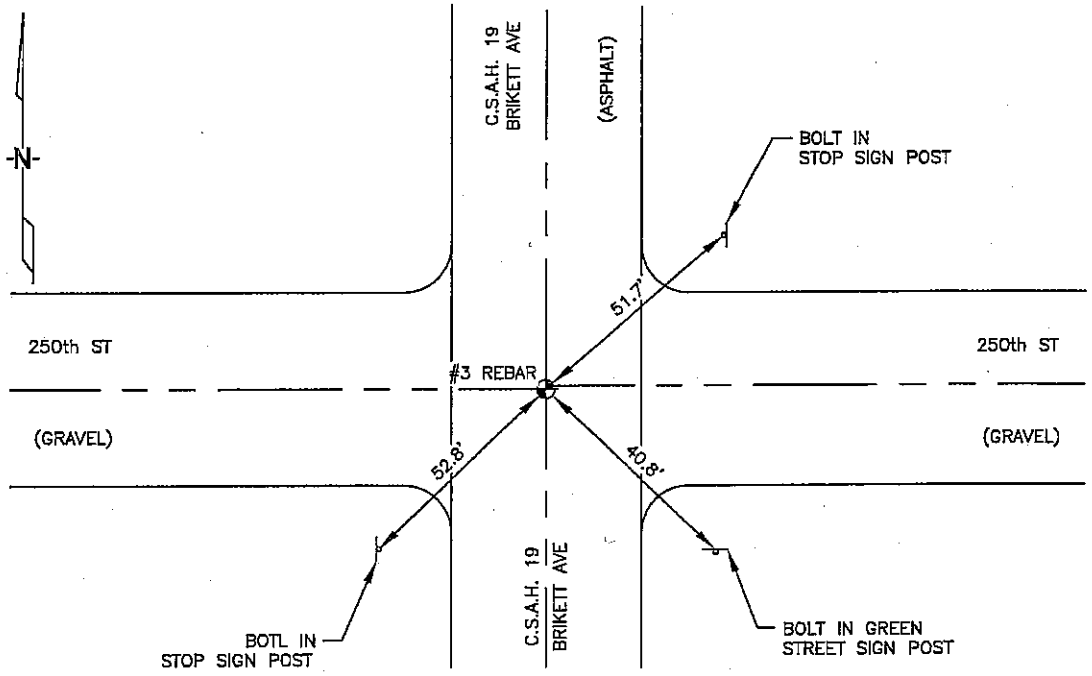

N: 564,619.74
E:2,091,607.96
MN SOUTH, NAD 83
NOT TO SCALE

Statement of evidence relative to this corner location is on back page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Thomas V. Zeff — 5/11/06
Thomas V. Zeff — Date

Registration No. 44563

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the day of _____ A.D. , 20

County Recorder _____

By _____ , Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

SOUTHEAST CORNER, SECTION 17, T. 102 N., R. 43 W.,
NOBLES COUNTY, MINNESOTA

1869 R.H.L. Jewett, US. Deputy Surveyor, monumented corner.

1963 MN DOT R/W Map for I–90, calls for a spike over a field stone, in place, 2544.4' south from I–90 C/L.

1/06/1971 MN DOT R/W Map for I–90, calls for an iron pipe, in place, 0.2' down at corner.
Ties: NE–79.45' to S.R.P. in power pole;
SE–55.25' to S.R.P. on top of post;
SW–54.55' to S.R.P. in telephone pole;
NW–79.85' to S.R.P. in power pole.

2/27/2006 Ulteig Engineers, Inc., Survey Crew, Dennis Lavallie Party Chief, found a 3/8" rebar in asphalt pavement at intersection.
Ties: NE–51.7' to bolt in steel, Stop Sign post;
SE–40.8' to bolt in Street Sign post;
SW–52.8' to bolt in Stop Sign post.