267354

Index No. E-19

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 11, Township 103N, Range 41W, 5th P.M.

STATE OF MINNESOTA, County of Nobles


At the corner location shown on the sketch:

☒ On 6/16/94 (DATE) found a stone 2.6 feet down in gravel roadway.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 11/23/96 (DATE) placed a 3/4" X 24" Iron Rod with Aluminum Cap 0.4 ft. below road surface.

SKETCH OF REFERENCE TIES

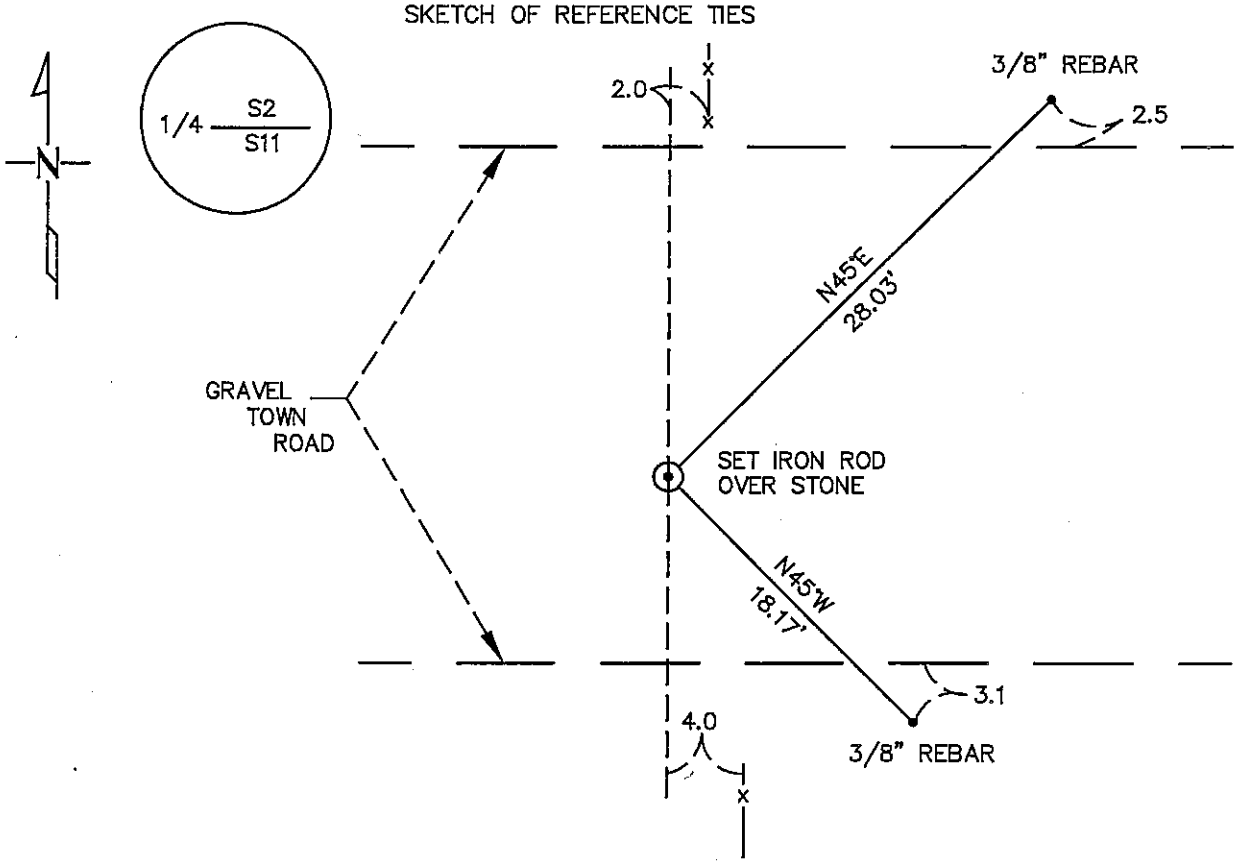

Statement of evidence relative to this corner location is on the back page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Jon J Nord — SIGNATURE — 30 DEC 96 — DATE

Registration No. 22033
Land Surveyor

OFFICE OF THE COUNTY RECORDER
County of Nobles

I hereby certify that this document was filed in the Co. Recorders office at 10:00 A .M. on the 28th day of May A.D., 1997

County Recorder Joyce Howard

By _____, Deputy

DOCUMENT NO. 267354

Direct ___ Computer ___
Photo ___
Tax $19.50 Paid 4/9/97

267354

Index No. E-19

Original position of the North Quarter Corner of Section 11, Township 103N, Range 41W, 5th P.M. was surveyed and set by G.L.O. Deputy Surveyor Jewett Howe in 1868. Mr. Howe set a post in mound with pits to mark said 1/4 Corner.

In 1902 Nobles County Survyor, M.S. Smith, references a stone marking the position of said Corner in a survey of Section 11, Surveyor's Record Book, pg 94.

Nobles County Highway Department "Corner Ties Book" calls for the following:
—stone in 1902
—stone in 1943

On June 16, 1994 Enviroscience, Inc. excavated the township roadway to a depth of 2.6 feet at the intersection of the centerline of said roadway with fencelines running North — South. The stone set in 1902 by M.S. Smith, County Surveyor, was found. The stone was accepted as the perpetuated position of the North Quarter Corner of Section 11, T 103N, R41W. A 5/8" X 24" Rebar was placed over said stone.

On November 23, 1996 Enviroscience Inc. placed a 3/4" X 24" Iron Rod with a MnDOT Aluminum Cap ~~over the top of~~ along side Rebar set in 1994.