DOCUMENT NUMBER A 318070

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH 1/4 Corner of Section 17, Township 103, Range 41, 5th P.M.

STATE OF MINNESOTA, County of NOBLES


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3/6/2008 (DATE) placed a 5/8" REBAR WITH RLS CAP "40827" 0.3' BELOW ROAD GRAVEL ROAD SURFACE

SKETCH OF REFERENCE TIES

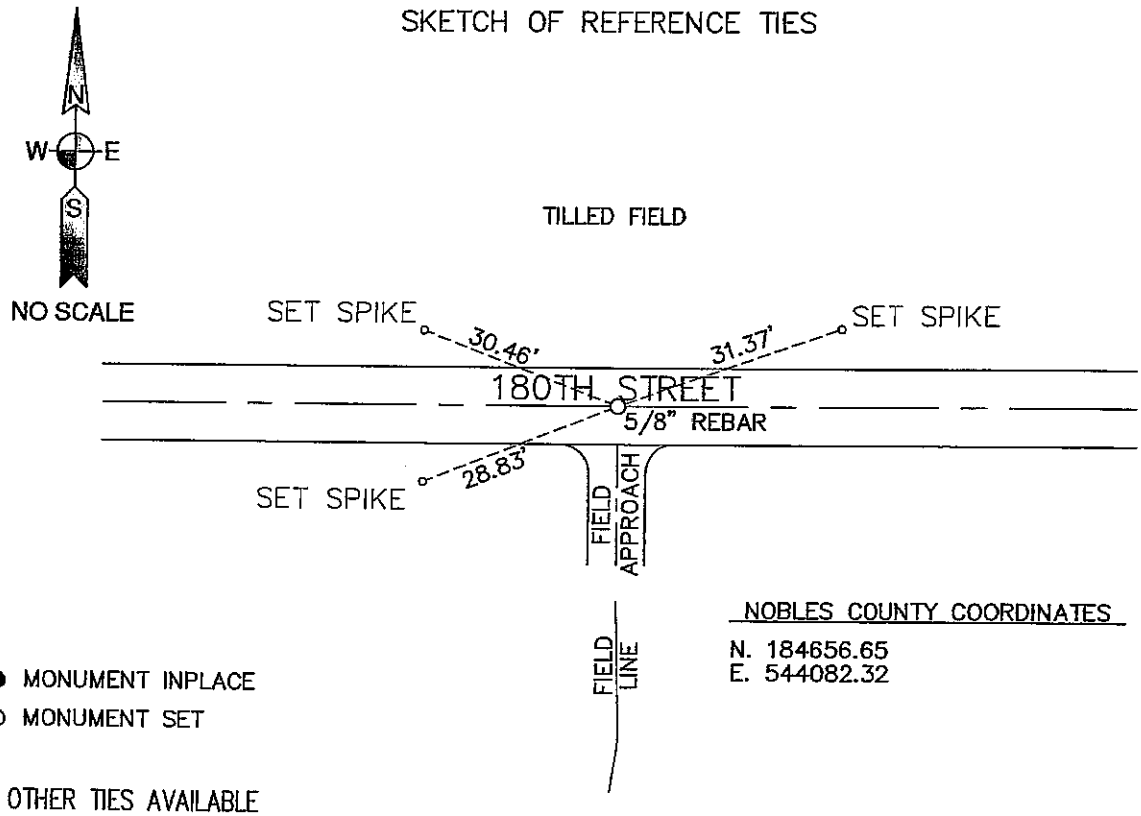

NOBLES COUNTY COORDINATES
N. 184656.65
E. 544082.32

● MONUMENT INPLACE
O MONUMENT SET

NO OTHER TIES AVAILABLE
BEARING SYSTEM IS BASED ON NOBLES COUNTY COORDINATES

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SURVEYOR'S NAME

3/17/08 DATE

Registration No. 40827

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 20____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

DOCUMENT NUMBER A 318070

STATEMENT OF EVIDENCE:

NORTH 1/4 CORNER, SECTION 17, T. 103 N., R. 41 W.,
NOBLES COUNTY, MINNESOTA

1868 Jewett & Howe, U.S. Deputy Surveyors, monumented corner.

2008 Ulteig Engineers, Inc., Survey Crew, Bob Kohler Party Chief, placed a 18" x 5/8" rebar with orange Ulteig "40827" cap down 0.3'.
Ties:NW-30.46' to a set spike;
NE-31.37' to a set spike;
SW-28.83' to a set spike;

DOCUMENT NUMBER A 318070

Certified, Filed and or Recorded on
Mar. 25,2008 AT 02:11PM

Lynn M. Wilson

NOBLES COUNTY RECORDER
LYNN M. WILSON
507-372-8216