267358

Index No. J-19

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

South Quarter Corner of Section 11, Township 103N, Range 41W, 5th P.M.

STATE OF MINNESOTA, County of Nobles


At the corner location shown on the sketch:

☒ On 6/16/94 (DATE) found a stone 2.3 feet down in gravel roadway.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 11/22/96 (DATE) placed a 3/4 X 24" Iron Rod with Aluminum MnDOT Cap over found stone.

SKETCH OF REFERENCE TIES

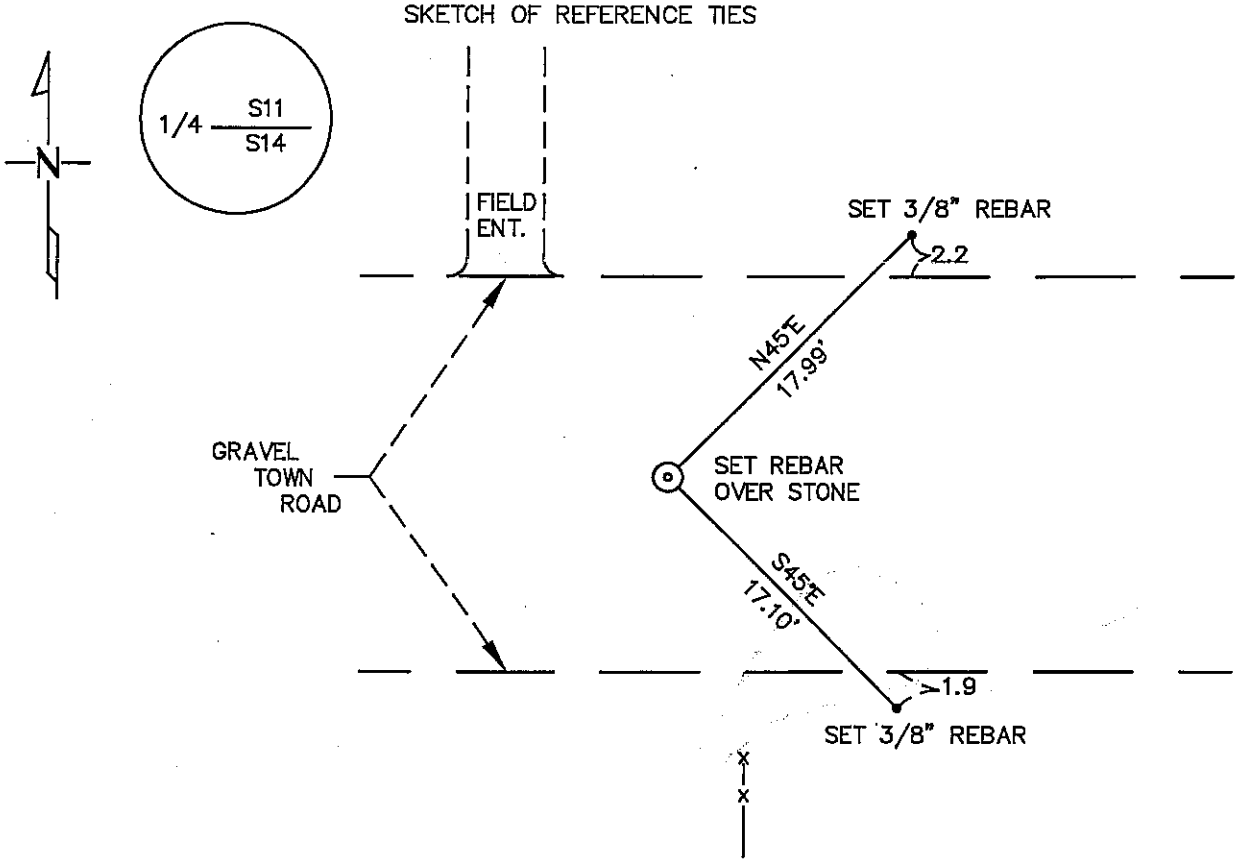

Statement of evidence relative to this corner location is on the back page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE

30 DEC 96
DATE

Registration No. 22033
Land Surveyor

OFFICE OF THE COUNTY RECORDER
County of Nobles

I hereby certify that this document was filed in the Co. Recorders office at 10:20 A .M. on the 15th day of May A.D., 1997

County Recorder Joyce Howard

By _____, Deputy

DOCUMENT NO. 267358

Abstract Company
Photo
Fee $12.50 # 906

267358

Index No. J-19

The original position of the South Quarter Corner of Section 11, Township 103N, Range 41 W, 5th P.M. was surveyed by G.L.O. Deputy Surveyor Jewett Howe in 1868. Position of said corner fell in a marsh and a Witness Corner was placed on line and one chain East. Witness Corner was marked by a post in mound with pits.

In 1902 Nobles County Surveyor, M.S. Smith, references a stone marking the location of said South Quarter Corner. There was not mention of the original Witness Corner to the East. Surveyor's Record Book, pg 94.

On June 16, 1994 Enviroscience, Inc. excavated the roadway to a depth of 2.3 feet at the intersection of the centerline of said roadway with a fenceline running South. The stone set in 1902 by M.S. Smith, County Surveyor, was found. The stone was accepted as the perpetuated position of the South Quarter Corner of Section 11, T 103N, R41W. A 5/8" X 24" Rebar was placed over said stone.

On November 22, 1996 Enviroscience, Inc. placed a 3/4" X 24" Iron Rod with an Aluminum MnDOT Cap along side of the Rebar set in 1994.