DOCUMENT NUMBER A 318083

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTHWEST Corner of Section 18, Township 103, Range 41, 5th P.M.

STATE OF MINNESOTA, County of NOBLES


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3/4/2008 (DATE) placed a 5/8" REBAR WITH RLS "40827" CAP 0.3' BELOW GRAVEL ROAD SURFACE

SKETCH OF REFERENCE TIES

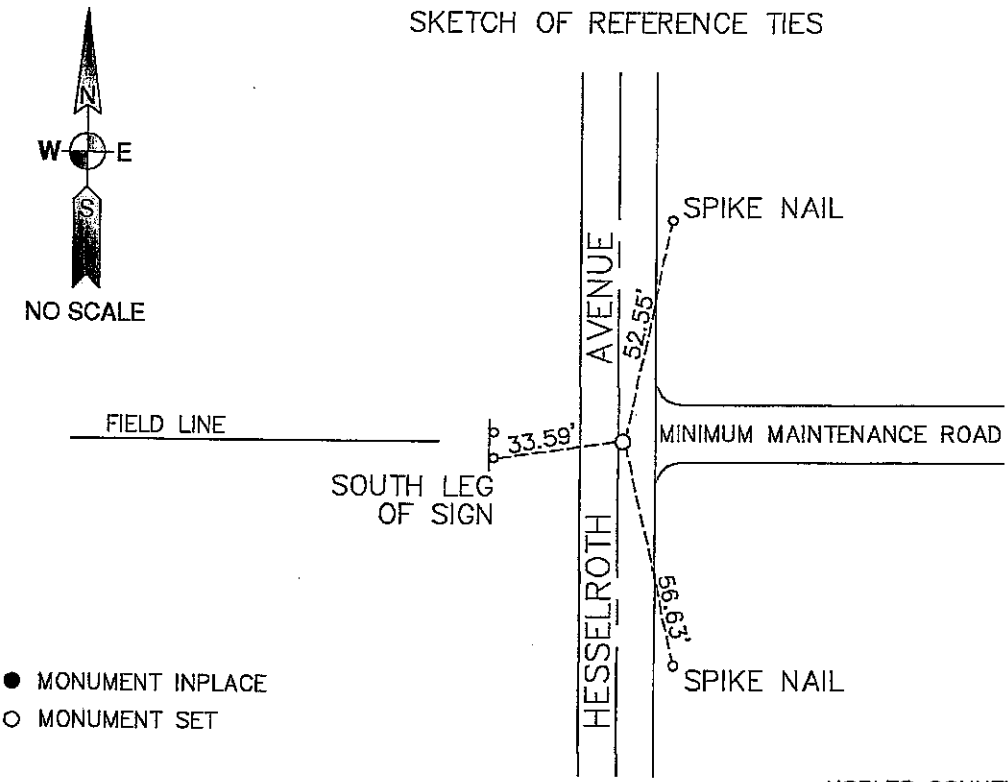

NO OTHER TIES AVAILABLE
BEARING SYSTEM IS BASED ON NOBLES COUNTY COORDINATES

NOBLES COUNTY COORDINATES
N. 179310.641
E. 536226.976

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 3-17-08
SURVEYOR'S NAME (DATE)

Registration No. 40827

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____
I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 20____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

SOUTHWEST CORNER, SECTION 18, T. 103 N., R. 41 W.,
NOBLES COUNTY, MINNESOTA

1867 Thomas B. Walker, U.S. Deputy Surveyor, monumented corner.

2008 Ulteig Engineers, Inc., Survey Crew, Bob Kohler Party Chief, placed an 18" x 5/8" rebar with orange Ulteig "40827" cap down 0.3'.
Ties: NE-52.55' to a spike nail set in road shoulder;
SE-56.63' to a spike nail set in road shoulder;
W-33.59' to the south leg of road sign.

DOCUMENT NUMBER A 318083

Certified, Filed and or Recorded on
Mar. 26, 2008 AT 11:07AM

Lynn M. Wilson

NOBLES COUNTY RECORDER
LYNN M. WILSON
507-372-8216