267357

Index No. G-17

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

West Quarter Corner of Section 11, Township 103N, Range 41W, 5th P.M.

STATE OF MINNESOTA, County of Nobles


At the corner location shown on the sketch:

☒ On 6/16/94 (DATE) found a stone 2.2 feet down in gravel roadway.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 6/16/94 (DATE) placed a 5/8" x 24" Aluminum capped rebar over found stone.

SKETCH OF REFERENCE TIES

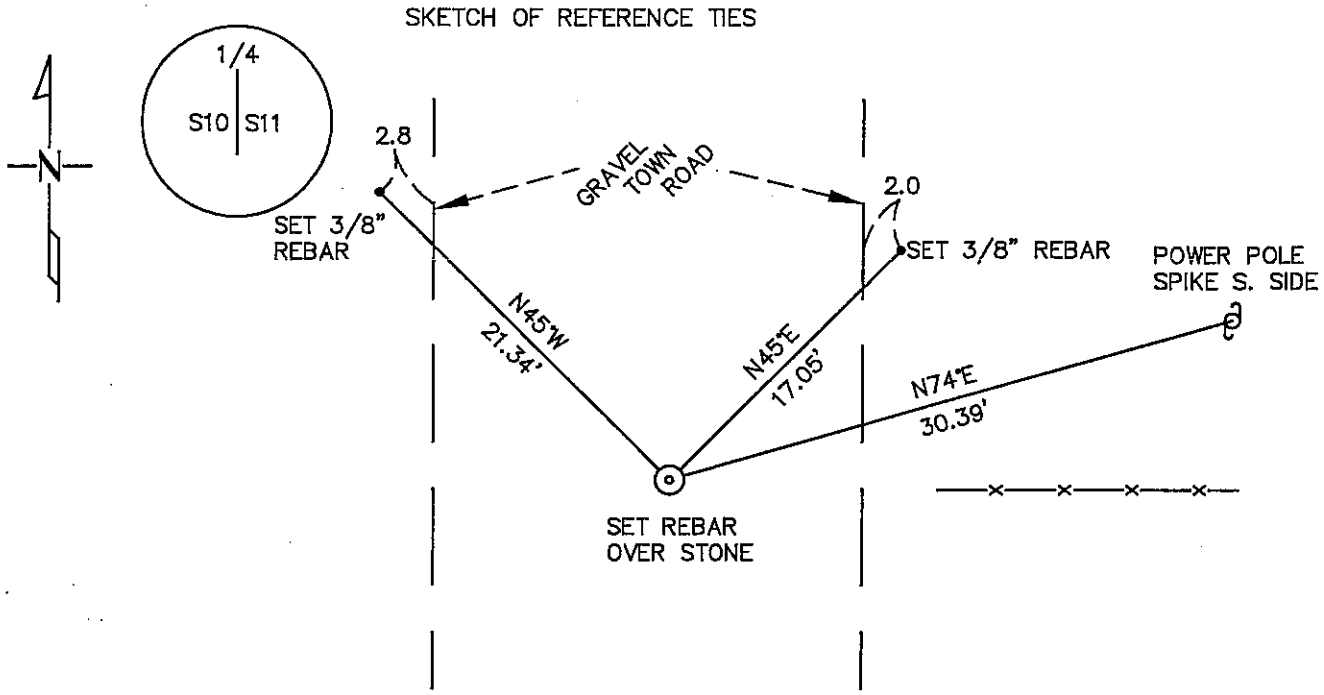

Statement of evidence relative to this corner location is on the back page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Lyle J Nord — SIGNATURE

30 DEC 96 — DATE

Registration No. 22033
Land Surveyor

OFFICE OF THE COUNTY RECORDER
County of Nobles

I hereby certify that this document was filed in the Co. Recorders office at 10:15 A.M. on the 28th day of May A.D., 1997

County Recorder Joyce Howard

By _____, Deputy

DOCUMENT NO. 267357

Tract ___ Company ___
Photo ___ By ___
Fee #12.50 # 906.1

The original position of the West Quarter Corner of Section 11, Township 103N, Range 41W, 5th P.M. was surveyed and set by G.L.O. Deputy Survyor Jewett Howe in 1868. Mr. Howe set a post in mound with pits to mark said 1/4 Corner.

June 1900 Nobles County Surveyor, M.S. Smith, references a stone marking the position of said corner in a survey of Section 10, T 103N, R41W, Surveyor's Record Book, pg 364.

In 1902 Nobles County Surveyor, M.S. Smith, again references a stone for said corner in a survey of Section 11, T 103N, R41W, Surveyor's Record Book, pg 94.

Nobles County Highway Department "Corner Ties Book" calls for the following:
—stone in 1900
—stone in 1902
—stone in 1936, placed wood stake

On June 16, 1994 Enviroscience, Inc. excavated the roadway to a depth of 2.2 feet at the intersection of the centerline of said roadway with fencelines running East – West. The stone set in 1900 by M.S. Smith, County Surveyor, was found along with the wood stake set in 1936. The stone was accepted as the perpetuated position of the West Quarter Corner of Section 11, T 103N, R41N. A 5/8" X 24" Rebar with an Aluminum Cap was placed over said stone.