

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 9 Township 104 Range 43 5th P.M.

STATE OF MINNESOTA, County of Nobles


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On June 3, 1996 placed a 1" iron pipe w/seal #11943 at road surface
DATE

SKETCH OF REFERENCE TIES

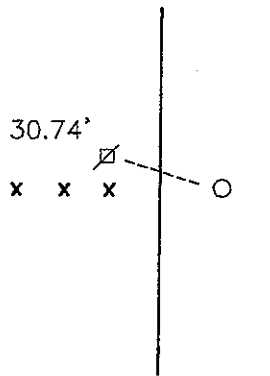

P.K. nail and seal in power pole - W 30.74'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Lele C. Moring 3-24-1998
SIGNATURE DATE

Registration No. 11943

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Nobles

I hereby certify that this document was filed in the Co. Recorders office at 11:30 A .M on the 25th day of March A.D. 1998

County Recorder James Howard
By _____, Deputy

DOCUMENT NO. 270665

TRACKED J COMPARED dm
PHOTO PW
FEE NC

Statement of Evidence

On June 3, 1996, Moseng Land Surveying, dug with back hoe in center line of road and in line with fence to the west and found nothing. Set a 1" iron pipe w/seal #11943 midway and on line.