DOCUMENT NUMBER A 318116

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH 1/4 Corner of Section 24, Township 104, Range 43, 5th P.M.

STATE OF MINNESOTA, County of NOBLES

At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____


☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3/5/2008 (DATE) placed a 18"X5/8" REBAR WITH RLS "40827" CAP FLUSH WITH GROUND SURFACE

SKETCH OF REFERENCE TIES



NO SCALE

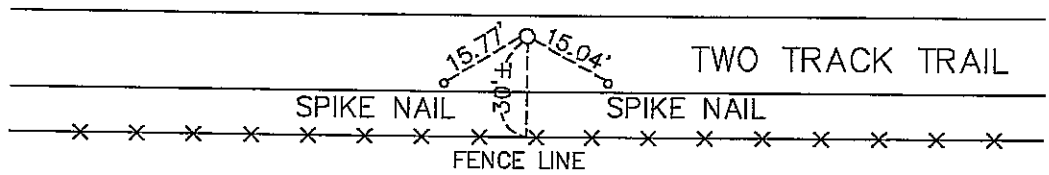

● MONUMENT INPLACE

○ MONUMENT SET

NO OTHER TIES AVAILABLE

BEARING SYSTEM IS BASED ON NOBLES COUNTY COORDINATES

NOBLES COUNTY COORDINATES
N. 211159.470
E. 501875.442

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SURVEYOR'S NAME

3-17-08 DATE

Registration No. 40827

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at ____ .M. on the ____ day of _____ A.D., 20____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

DOCUMENT NUMBER A 318116

STATEMENT OF EVIDENCE:

NORTH 1/4 CORNER, SECTION 24, T. 104 N., R. 43 W.,
NOBLES COUNTY, MINNESOTA

1869 R.H.L. Jewett, U.S. Deputy Surveyor, monumented corner.

2008 Ulteig Engineers, Inc., Survey Crew, Bob Kohler Party Chief, placed a 18" x 5/8" rebar with orange Ulteig "40827" flush with ground surface.
Ties: SW-15.77' to a set spike in trail edge;
SE-15.04' to a set spike in trail edge;
S-30'+/- to east-west fence line.

DOCUMENT NUMBER A 318116

Certified, Filed and or Recorded on
Mar. 26, 2008 AT 01:30PM

Lynn M. Wilson

NOBLES COUNTY RECORDER
LYNN M. WILSON
507-372-8216