DOCUMENT NUMBER A 318122

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTH 1/4 Corner of Section 36, Township 104N, Range 43W, 5th P.M.

STATE OF MINNESOTA, County of NOBLES


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-5-08 (DATE) placed a 18"x5/8" REBAR WITH 40827 CAP DOWN 0.3' BELOW GRAVEL SURFACE

SKETCH OF REFERENCE TIES

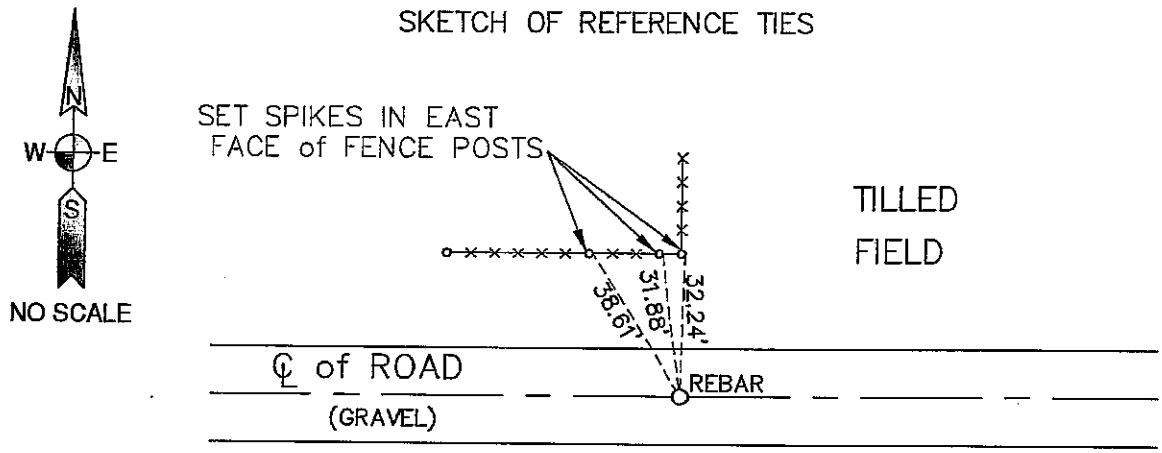

● MONUMENT INPLACE

○ MONUMENT SET

TILLED FIELD

NOBELS COUNTY COORDINATES
N: 195275.843
E: 501878.834

NO OTHER TIES AVAILABLE
BEARING SYSTEM IS BASED NOBLES COUNTY COORDINATES

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SURVEYOR'S NAME _____ DATE 3-17-08

Registration No. 40827

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at ____ .M. on the ____ day of _____ A.D., 20____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

SOUTH 1/4 CORNER, SECTION 36, T. 104 N., R. 43 W.,
NOBLES COUNTY, MINNESOTA

1867 Thomas B. Walker, U.S. Deputy Surveyor, monumented corner.

2008 Ulteig Engineers, Inc., Survey Crew, Bob Kohler Party Chief, placed a 18" x 5/8" rebar with orange Ulteig "40827" cap down 0.3'.
Ties: NW-38.61' to a set nail in fence post;
NW-31.88' to a set nail in fence post;
N-32.24' to a set nail in fence post.

DOCUMENT NUMBER A 318122

Certified, Filed and or Recorded on
Mar. 26, 2008 AT 02:00PM

Lynn M. Wilson

NOBLES COUNTY RECORDER
LYNN M. WILSON
507-372-8216