DOCUMENT NUMBER A 318115

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST 1/4 Corner of Section 24, Township 104, Range 43, 5th P.M.

STATE OF MINNESOTA, County of NOBLES


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3/6/2008 (DATE) placed a PK NAIL FLUSH WITH ROAD SURFACE

SKETCH OF REFERENCE TIES

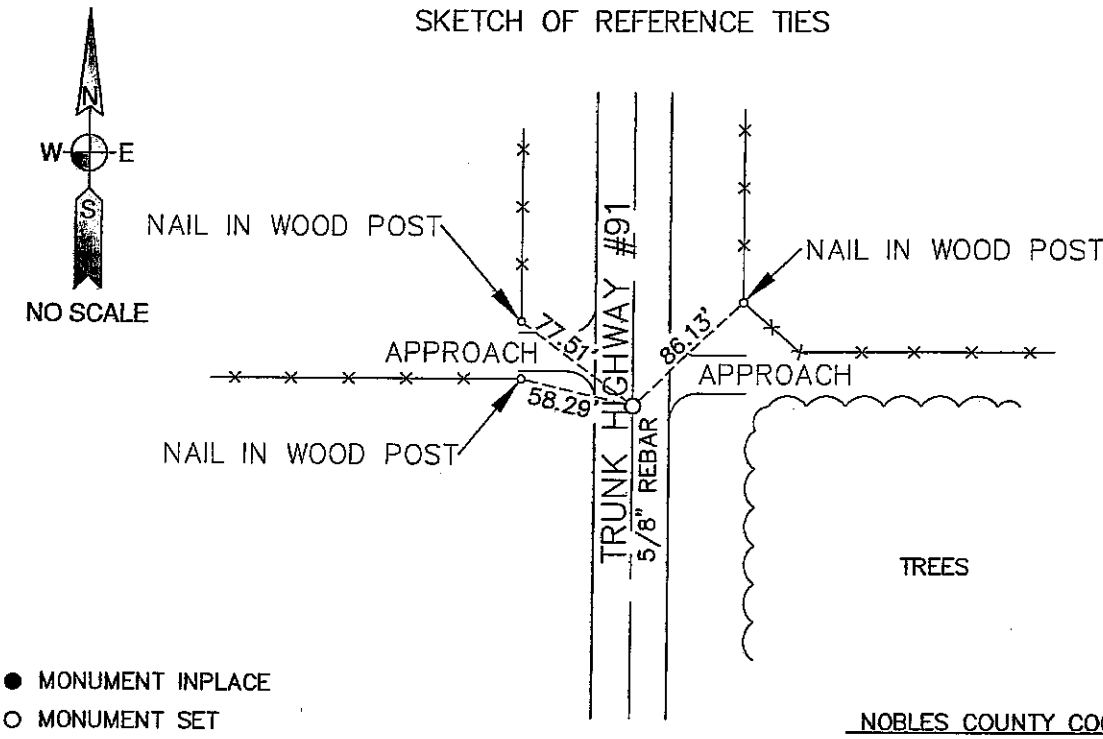

● MONUMENT INPLACE

○ MONUMENT SET

NOBLES COUNTY COORDINATES

N. 208526.18
E. 504531.08

NO OTHER TIES AVAILABLE
BEARING SYSTEM IS BASED ON NOBLES COUNTY COORDINATES

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SURVEYOR'S NAME) 3-17-08 (DATE)

Registration No. 40827

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 20____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

EAST 1/4 CORNER, SECTION 24, T. 104 N., R. 43 W.,
NOBLES COUNTY, MINNESOTA

1867 Thomas B. Walker, U.S. Deputy Surveyor, monumented corner.

2008 Ulteig Engineers, Inc., Survey Crew, Bob Kohler Party Chief, placed a PK-Nail west of the centerline of State Highway 91.
Ties: NE-86.13' to a set nail in wood post;
NW-77.51' to a set nail in wood post;
W-58.29' to a set nail in wood post.

DOCUMENT NUMBER A 318115

Certified, Filed and or Recorded on
Mar. 26, 2008 AT 01:25PM

Lynn M. Wilson

NOBLES COUNTY RECORDER
LYNN M. WILSON
507-372-8216